



The LOYREL-816 is a relay interface containing eight 16 A relays that are controlled by eight 0/10 V outputs on a L-IOB, LROC-400 or LROC-402.


Features

- Relay Interface for L-IOB, LROC-400 or LROC-402
- Controls up to eight 16 A relays using 0/10 V inputs
- Up to 64 A total current.

Specifications

Dimensions (mm)	107 x 100 x 60 (L x W x H), DIM079
Installation	DIN rail mounting following DIN 43880, top hat rail EN 50022
Power supply	24 V DC
Power consumption	up to 3.2 W
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Interfaces	8 x Digital Output (16 A Relays) 8 x Digital Input (0/10 V), input 0 V: Relay off, Input 10 V: Relay on
For use with	L-IOB, LROC-400 or LROC-402

Wiring example:

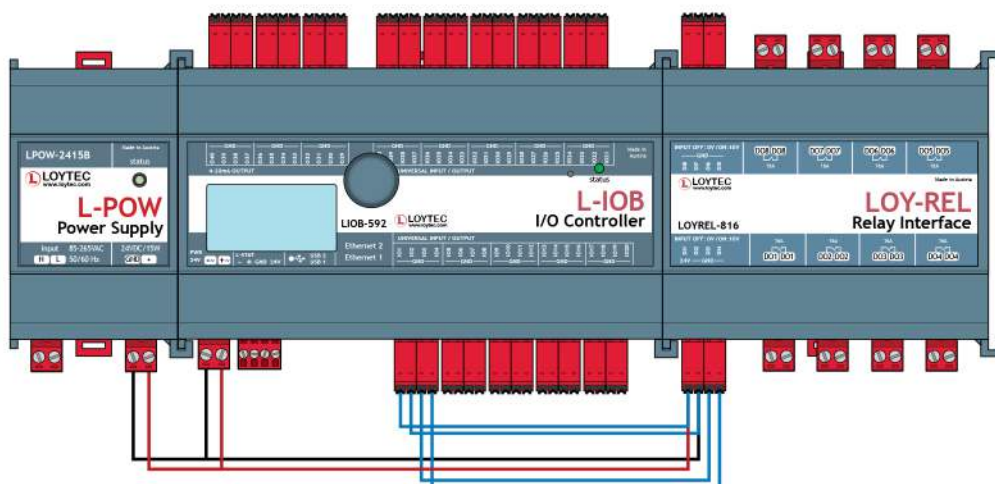

Order number Product description

LOYREL-816 Relay interface, 8 x Digital Output 16 A Relays, 8 x Digital Input 0/10 V

Dimensions of the devices in mm and [inch]

DIM079 LOYREL-816

